




FCD180A 换向放水电磁阀

Reversing water
discharge solenoid valve

性能参数 FUNCTION PARAMETERS

额定电压 Rated Voltage	DC12V
适用水压 Pressure Range	0~0.05MPa
使用寿命 Operate Life	≥ 50000 次 OPS
安装间距 Spacing	19.2mm × 34mm
进水口 Inlet	Φ6.3mm
出水口 Outlet	Φ6.3mm
工作原理 Working principle	2号口是电磁阀进水口，电磁阀非通电状态1号口出水，电磁阀通电状态3号口出水 Port 2 is the inlet of the solenoid valve, port 1 discharges water in the non-energized state of the solenoid valve, and port 3 discharges water in the energized state of the solenoid valve

尺寸图 DIMENSIONS

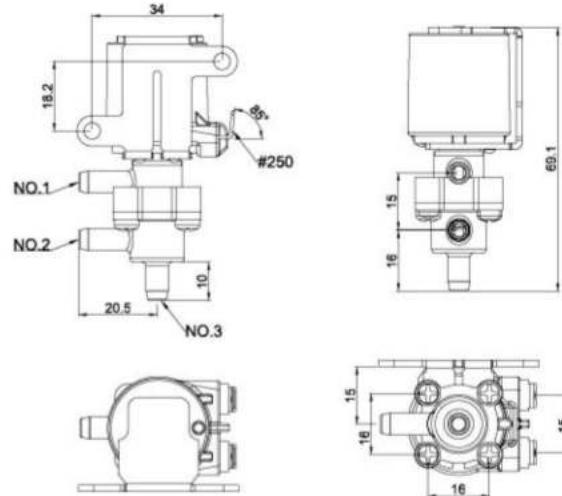

* 可根据客户需求专业定制。
Specification and design can be customized

流量特性 FLOW CHARACTERISTIC

水压 Hydraulic Pressure	0.05MPa
流量 Flow Rate	> 1L/min